
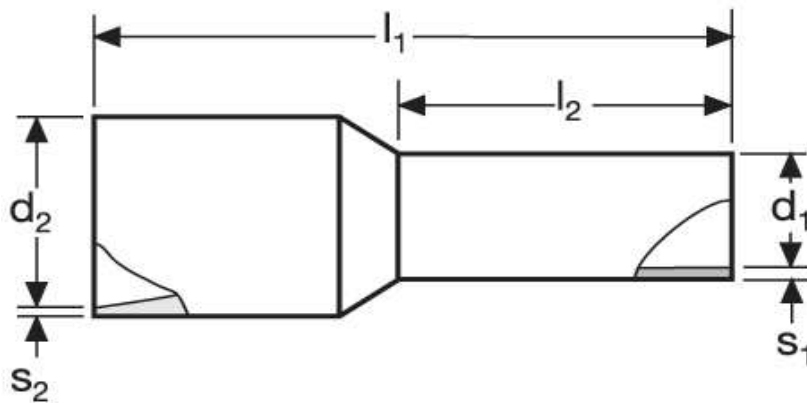



## Aderendhülsen 0,5 mm<sup>2</sup> N



		Material	Isolation		
		E-Cu, gal. Sn	PA	0,079 / 1000	500
		$l_1$	$l_2$	$d_1$	$s_1$
in mm:		14,0	8,0	1	0,15
		<b>WE</b>	<b>TM</b>	<b>DIN</b>	
$d_2$	$s_2$	A 20308	A 22308	A 24108	
2,6	0,3	orange	weiß	weiß	

Stand: 09.07.2014

## Cord end - sleeves 0,5 mm<sup>2</sup> N

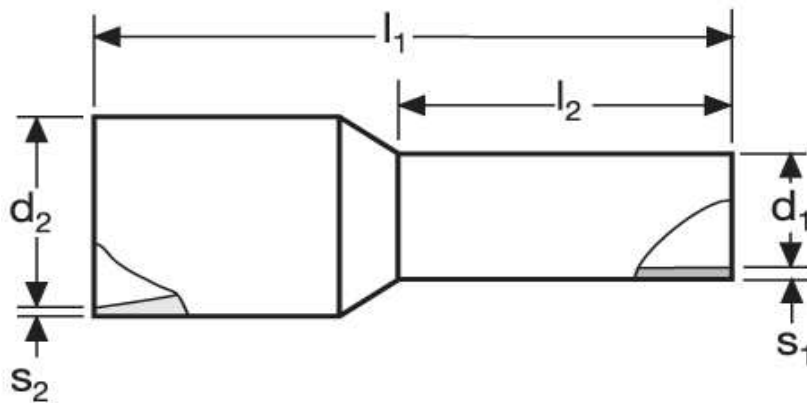

		material	insulation		
		E-Cu, gal. Sn	PA	0,079 / 1000	500
		l <sub>1</sub>	l <sub>2</sub>	d <sub>1</sub>	s <sub>1</sub>
in mm:		14,0	8,0	1	0,15
		WE	TM	DIN	
d <sub>2</sub>	s <sub>2</sub>	A 20308	A 22308	A 24108	
2,6	0,3	orange	white	white	

date: 09.07.2014