


## Aderendhülsen

0,34 mm<sup>2</sup> L

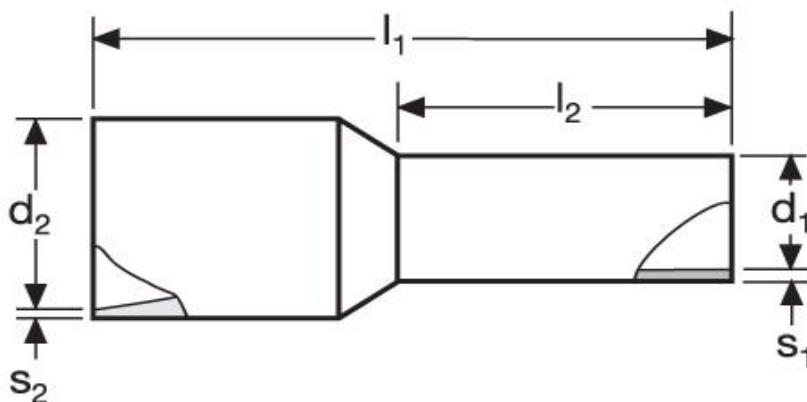

Material	Isolation		
E-Cu, gal. Sn	PP	0,052 / 1000	500


	$l_1$	$l_2$	$d_1$	$s_1$
in mm:	12,0	8,0	0,8	0,15

		WE	TM	DIN
$d_2$	$s_2$	A 20208M	A 22208M	A 20218M
2,0	0,25	türkis	grün	pink

Stand: 09.01.2019

## Cord end - sleeves

0,34 mm<sup>2</sup> L

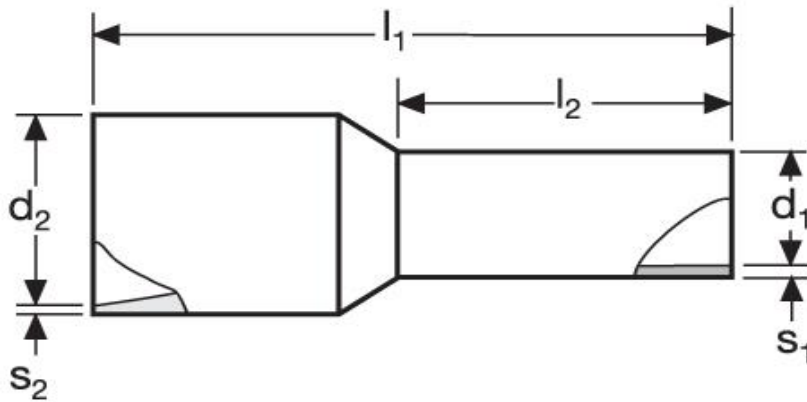

		material	insulation		
		E-Cu, gal. Sn	PP	0,052 / 1000	500
		l <sub>1</sub>	l <sub>2</sub>	d <sub>1</sub>	s <sub>1</sub>
in mm:		12,0	8,0	0,8	0,2
		WE	TM	DIN	
d <sub>2</sub>	s <sub>2</sub>	A 20208M	A 22208M	A 20218M	
2,0	0,25	turquoise 	green 	pink 	

date: 09.01.2019