


## Aderendhülsen für Leiter mit verstärkter Isolation 1 mm<sup>2</sup> N

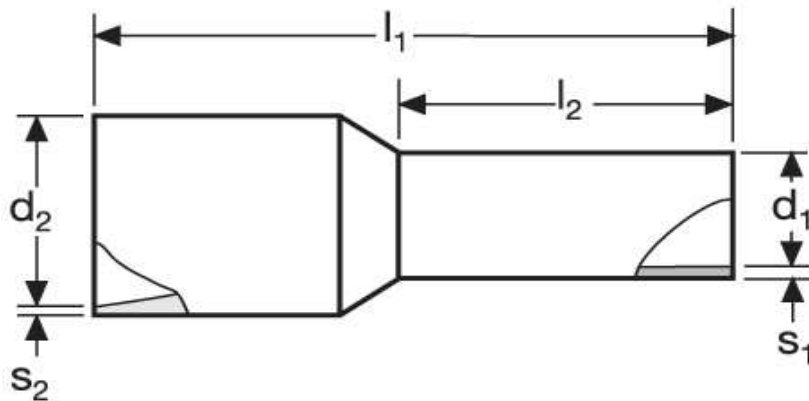


Material	Isolation		
E-Cu, gal. Sn	PP	0,089 / 1000	500

	$l_1$	$l_2$	$d_1$	$s_1$
in mm:	14,5	8	1,4	0,15

		WE	TM	DIN
$d_2$	$s_2$	A 20508-GB	A 22508-GB	A 24308-GB
3,4	0,3	gelb 	rot 	rot 

Stand: 17.07.2014

**Cord end - sleeves**  
for tri-rated cables  
1 mm<sup>2</sup> N

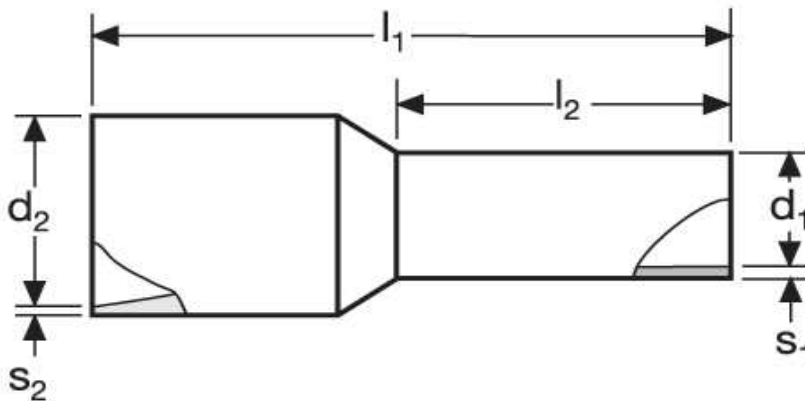

material	insulation		
E-Cu, gal. Sn	PP	0,089 / 1000	500

	$l_1$	$l_2$	$d_1$	$s_1$
in mm:	14,5	8	1,4	0,15

		WE	TM	DIN
$d_2$	$s_2$	A 20508-GB	A 22508-GB	A 24308-GB
3,4	0,3	yellow 	red 	red 

date: 17.07.2014