
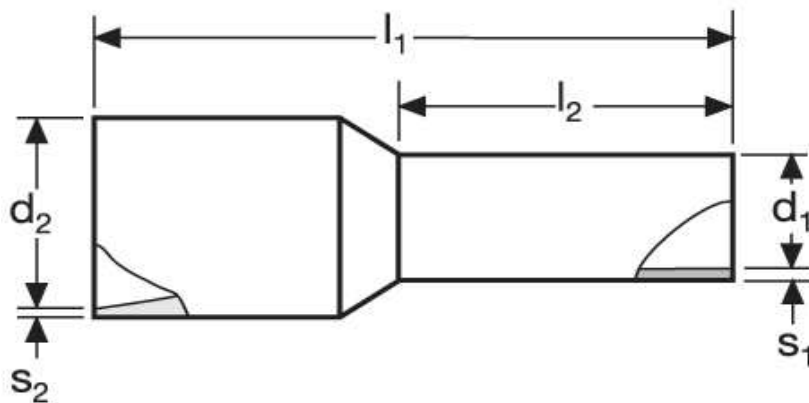


## Aderendhülsen für Leiter mit verstärkter Isolation 16 mm<sup>2</sup> N





Material	Isolation		
E-Cu, gal. Sn	PP	0,710 / 1000	500

	$l_1$	$l_2$	$d_1$	$s_1$
in mm:	23,0	12	6	0,2

	$d_2$	$s_2$	WE	TM	DIN
	9,5	0,4	A 20708-GB	A 22708-GB	A 24508-GB
			grün 	grau 	blau 

Stand: 17.07.2014

**Cord end - sleeves**  
for tri-rated cables  
16 mm<sup>2</sup> N

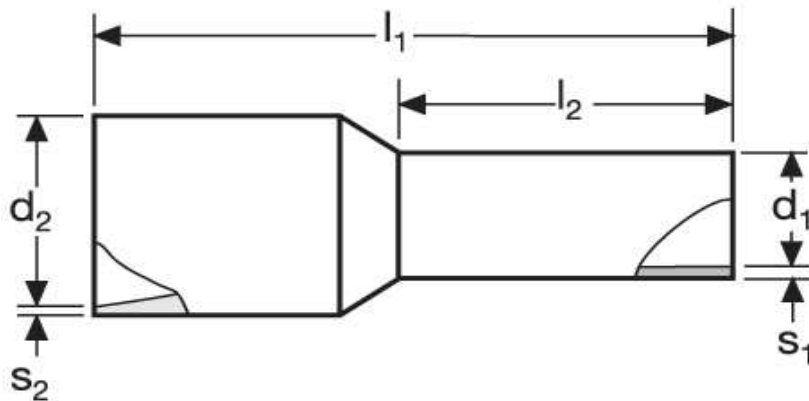

material	insulation		
E-Cu, gal. Sn	PP	0,710 / 1000	500

	$l_1$	$l_2$	$d_1$	$s_1$
<b>in mm:</b>	23,0	12	6	0,2

	$d_2$	$s_2$	WE	TM	DIN
	9,5	0,4	A 20708-GB	A 22708-GB	A 24508-GB
			green 	grey 	blue 

date: 17.07.2014