
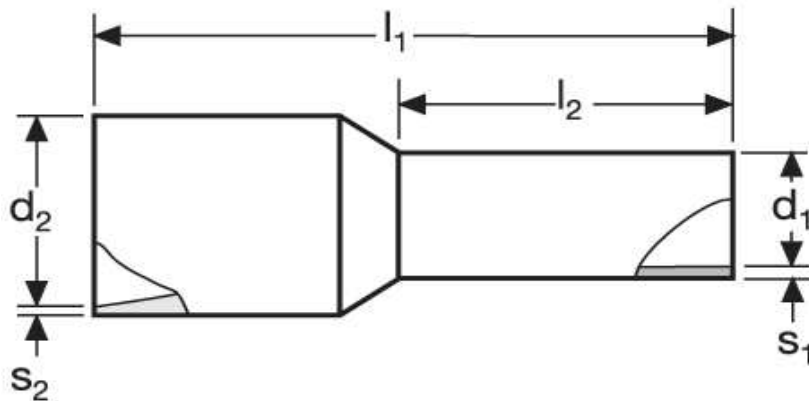


Aderendhülsen für kurzschluss sichere Leitungen 6 mm² N





Material	Isolation		
E-Cu, gal. Sn	PA	0,674 / 1000	100

	l_1	l_2	d_1	s_1
in mm:	23,1	12	3,8	0,2

	d_2	s_2	WE	TM	DIN
	8,3	0,6	A 20912-SI schwarz	A 22912-SI grün	A 24712-SI gelb

Stand: 17.07.2014

Cord end - sleeves
for short-circuit resistant conductors
6 mm² N

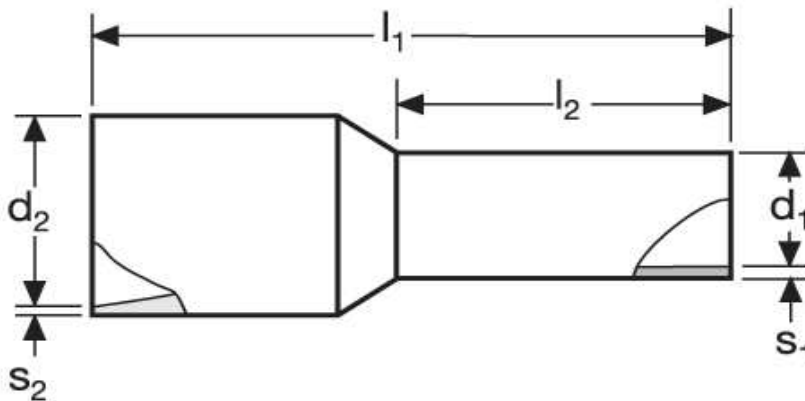

Material	Isolation		
E-Cu, gal. Sn	PA	0,674 / 1000	100

	l_1	l_2	d_1	s_1
in mm:	23,1	12	3,8	0,2

		WE	TM	DIN
d_2	s_2	A 20912-SI	A 22912-SI	A 24712-SI
8,3	0,6	black 	green 	yellow

date: 17.07.2014