
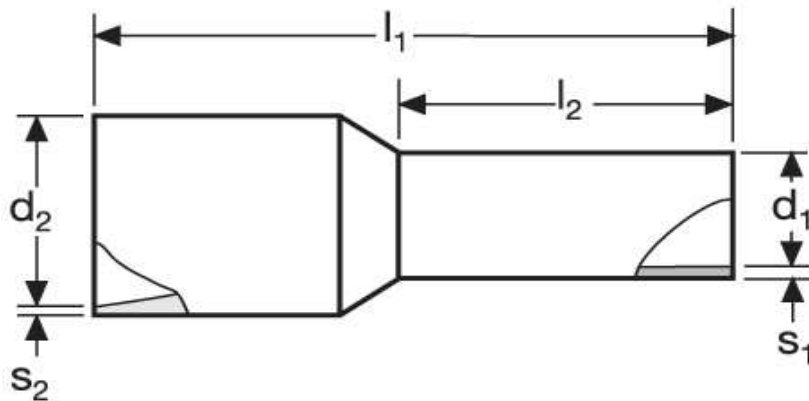


## Aderendhülsen

für Leiter mit verstärkter Isolation  
0,5 mm<sup>2</sup> N





Material	Isolation		
E-Cu, gal. Sn	PP	0,078 / 1000	500

	$l_1$	$l_2$	$d_1$	$s_1$
in mm:	13,5	8	1,1	0,15

		WE	TM	DIN
$d_2$	$s_2$	A 20308-GB	A 22308-GB	A 24108-GB
3,0	0,25	orange 	weiß 	weiß 

Stand: 31.07.2014

**Cord end - sleeves**  
for tri-rated cables  
0,5 mm<sup>2</sup> N

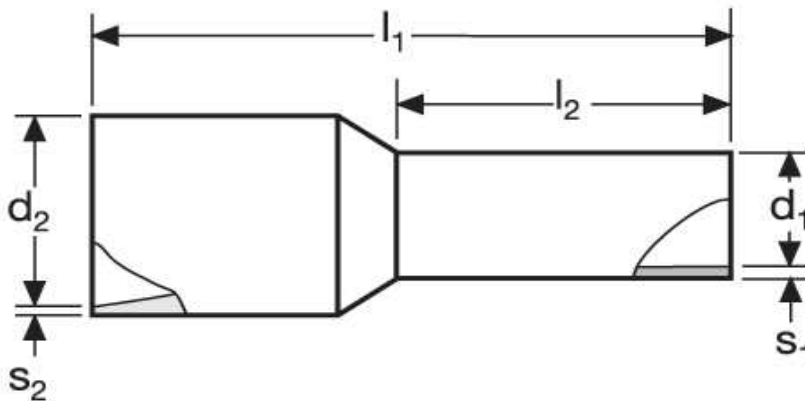

material	insulation		
E-Cu, gal. Sn	PP	0,078 / 1000	500

	$l_1$	$l_2$	$d_1$	$s_1$
in mm:	13,5	8	1,1	0,15

		WE	TM	DIN
$d_2$	$s_2$	A 20308-GB	A 22308-GB	A 24108-GB
3,0	0,25	orange 	white 	white 

date: 31.07.2014