
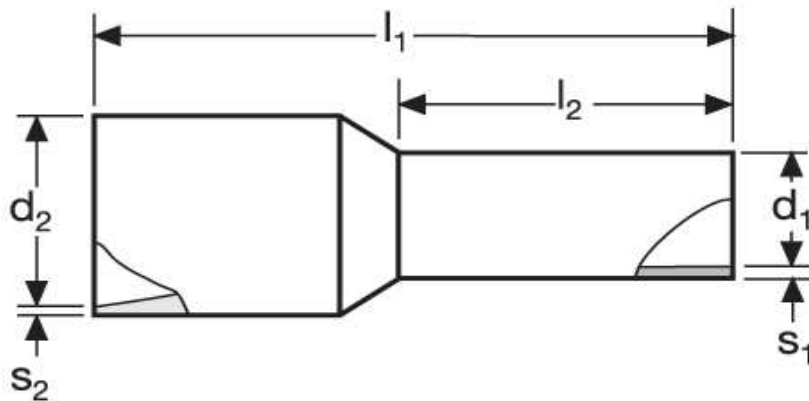


Aderendhülsen für kurzschluss sichere Leitungen 2,5 mm² N





| Material | Isolation | | |
|---------------|-----------|--------------|-----|
| E-Cu, gal. Sn | PA | 0,308 / 1000 | 100 |

| | l_1 | l_2 | d_1 | s_1 |
|--------|-------|-------|-------|-------|
| in mm: | 17,6 | 8 | 2,3 | 0,15 |

| | d_2 | s_2 | WE | TM | DIN |
|--|-------|-------|--------------------|--------------------|--------------------|
| | 7,8 | 0,6 | A 20708-SI blau | A 22708-SI grau | A 24508-SI blau |
| | | | | | |

Stand: 05.08.2014

Cord end - sleeves
for short-circuit resistant conductors
2,5 mm² N

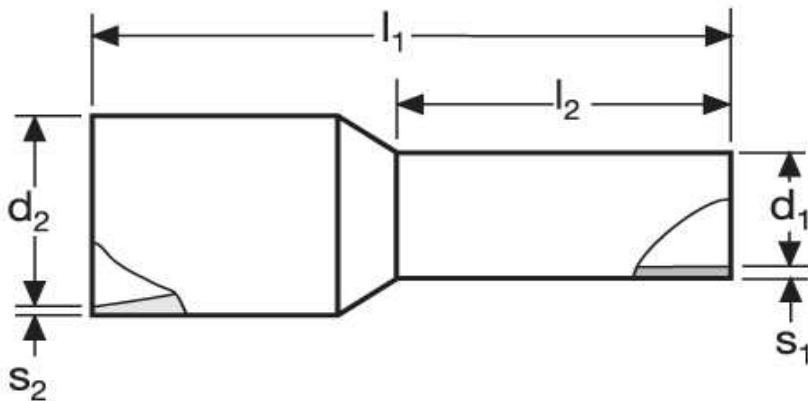

| material | insulation | | |
|---------------|------------|--------------|-----|
| E-Cu, gal. Sn | PA | 0,308 / 1000 | 100 |

| | l_1 | l_2 | d_1 | s_1 |
|--------|-------|-------|-------|-------|
| in mm: | 17,6 | 8 | 2,3 | 0,15 |

| | | WE | TM | DIN |
|-------|-------|------------|------------|------------|
| d_2 | s_2 | A 20708-SI | A 22708-SI | A 24508-SI |
| 7,8 | 0,6 | blue | grey | blue |

Stand: 05.08.2014