


## Aderendhülsen für kurzschluss sichere Leitungen 10 mm<sup>2</sup> N

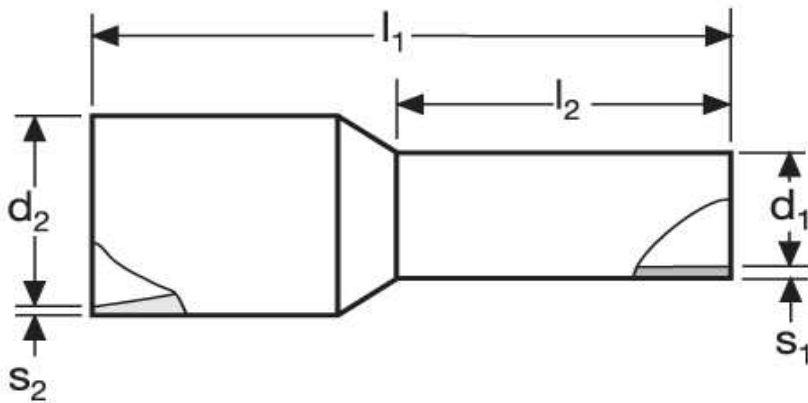


Material	Isolation		
E-Cu, gal. Sn	PA	0,789 / 1000	100

	$l_1$	$l_2$	$d_1$	$s_1$
in mm:	23,7	12	4,5	0,2

		WE	TM	DIN
$d_2$	$s_2$	A 21012-SI	A 23012-SI	A 24812-SI
9,8	0,7	elfenbein 	braun 	rot 

Stand: 05.08.2014

**Cord end - sleeves**  
for short-circuit resistant conductors  
10 mm<sup>2</sup> N

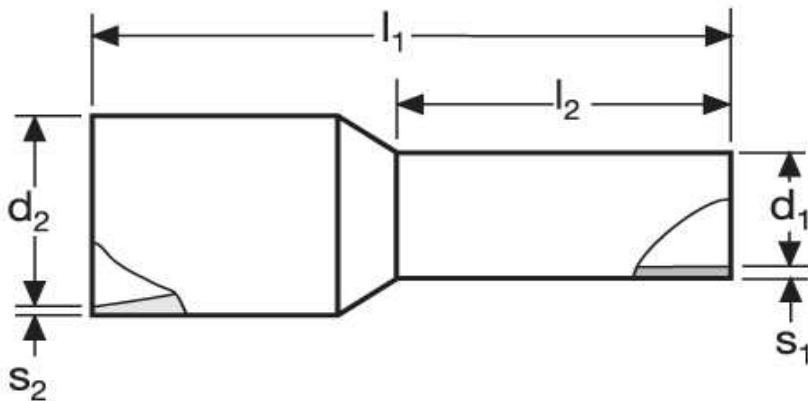

material	insulation		
E-Cu, gal. Sn	PA	0,789 / 1000	100

	$l_1$	$l_2$	$d_1$	$s_1$
in mm:	23,7	12	4,5	0,2

		WE	TM	DIN
$d_2$	$s_2$	A 21012-SI	A 23012-SI	A 24812-SI
9,8	0,7	ivory 	brown 	red 

date: 05.08.2014