


## Aderendhülsen für kurzschluss sichere Leitungen 16 mm<sup>2</sup> N

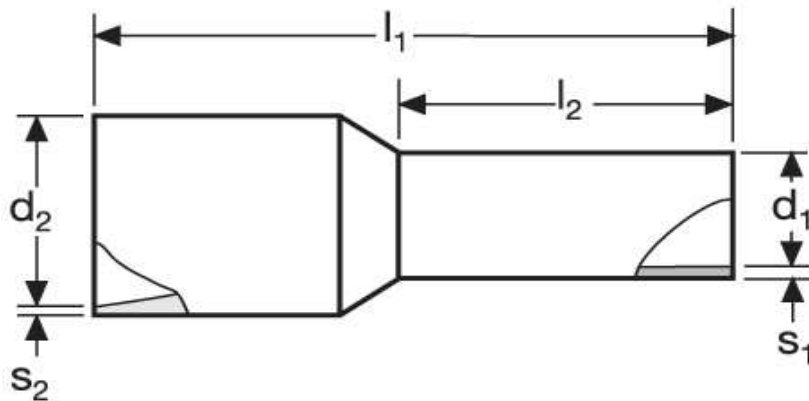



Material	Isolation		
E-Cu, gal. Sn	PA	1,062 / 1000	100

	$l_1$	$l_2$	$d_1$	$s_1$
in mm:	25,8	12	6	0,2

		WE	TM	DIN
$d_2$	$s_2$	A 21112-SI	A 23112-SI	A 24912-SI
12,2	0,6	grün 	weiß 	blau 

Stand: 05.08.2014

**Cord end - sleeves**  
for short-circuit resistant conductors  
16 mm<sup>2</sup> N

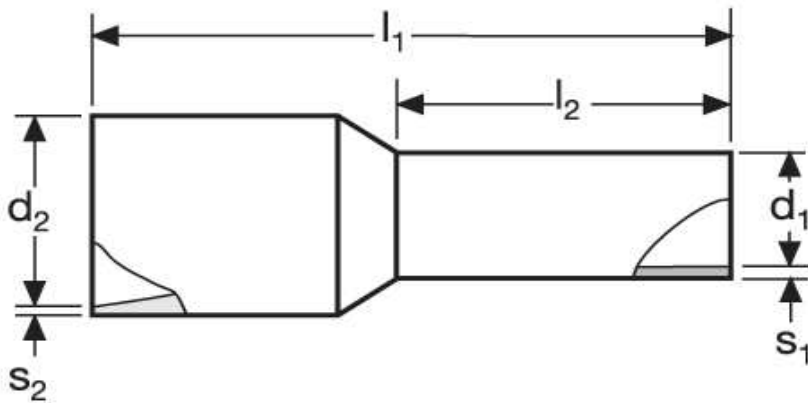

material	insulation		
E-Cu, gal. Sn	PA	1,062 / 1000	100

	$l_1$	$l_2$	$d_1$	$s_1$
in mm:	25,8	12	6	0,2

	$d_2$	$s_2$	WE	TM	DIN
	12,2	0,6	A 21112-SI green 	A 23112-SI white 	A 24912-SI blue 

date: 05.08.2014