





Stoßverbinder
mit Schrumpfschlauchisolation
aus Polyolefin mit Innenkleber
0,5 mm² - transparent



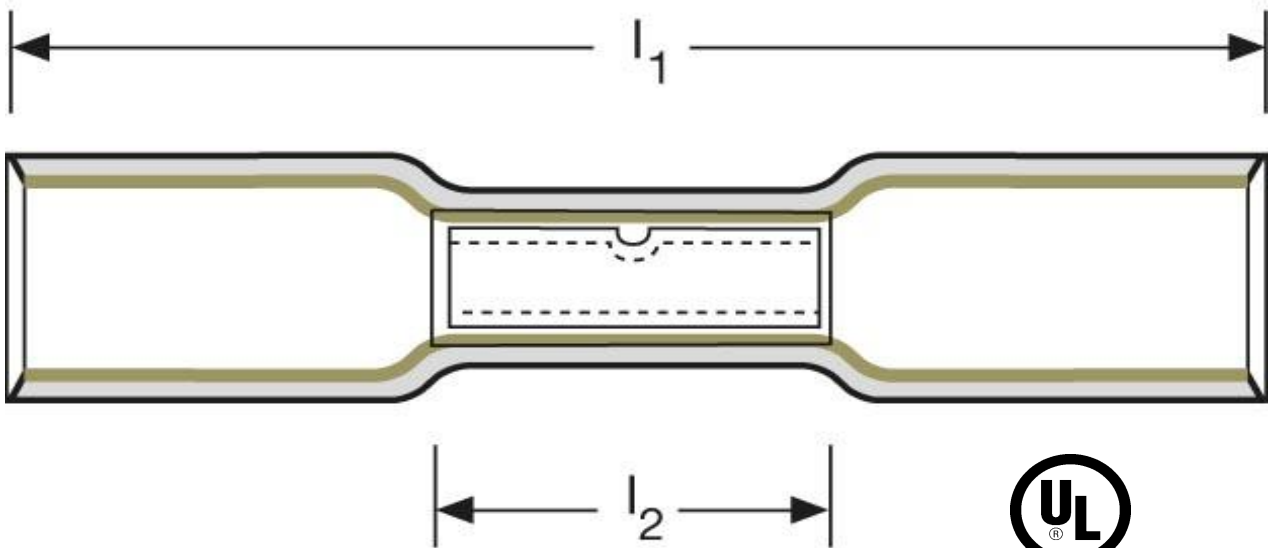

| | | | |
|---------------------------|-------------------------------|---|---|
| Art.Nr. | Werkstoff |  |  |
| K 410005 HS | Cu galv. Sn | 0,47/1000 | 1.000 |
| | l₁ | l₂ | s |
| in mm: | 28,9 | 11,5 | 0,50 |
| Schrumpftemperatur | Durchschlagsfestigkeit | | |
| 125°C | 14 kV / mm | | |

Stand: 22.04.2016

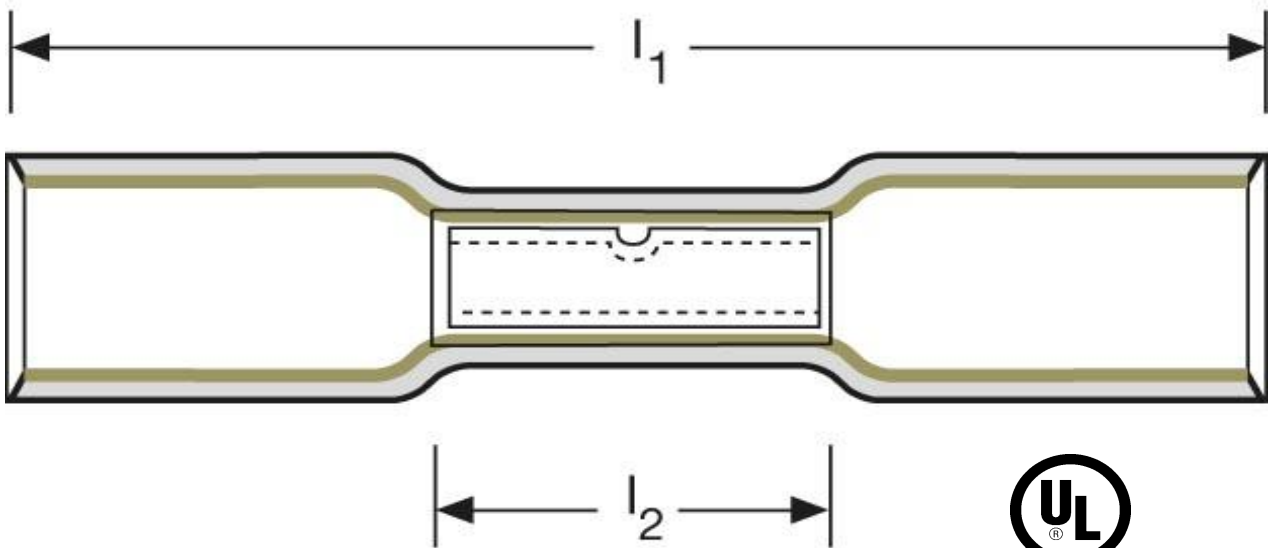Butt - connectors
with shrinking tube insulation
made of polyolefine with inner adhesive
0,5 mm² - cleaer



LISTED
E328883

| | | | |
|------------------------------|----------------------------|---|---|
| part no. | material |  |  |
| K 410005 HS | Cu gal. Sn | 0,47/1000 | 1.000 |
| | l₁ | l₂ | s |
| in mm: | 28,9 | 11,5 | 0,5 |
| shrinking temperature | dielectric strength | | |
| 125°C | 14 kV / mm | | |

date: 22.04.2016