



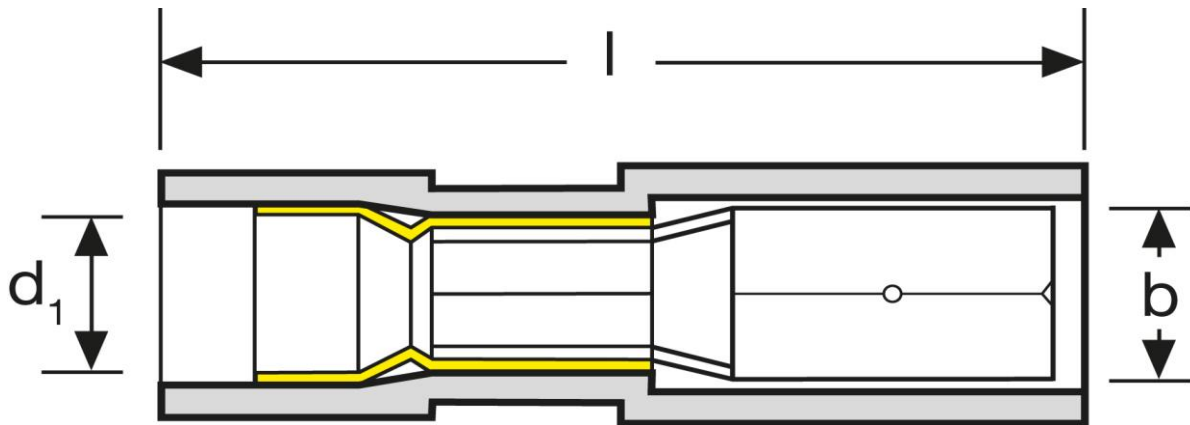
Rundsteckhülse vollisoliert
1,5 mm² - 4 mm

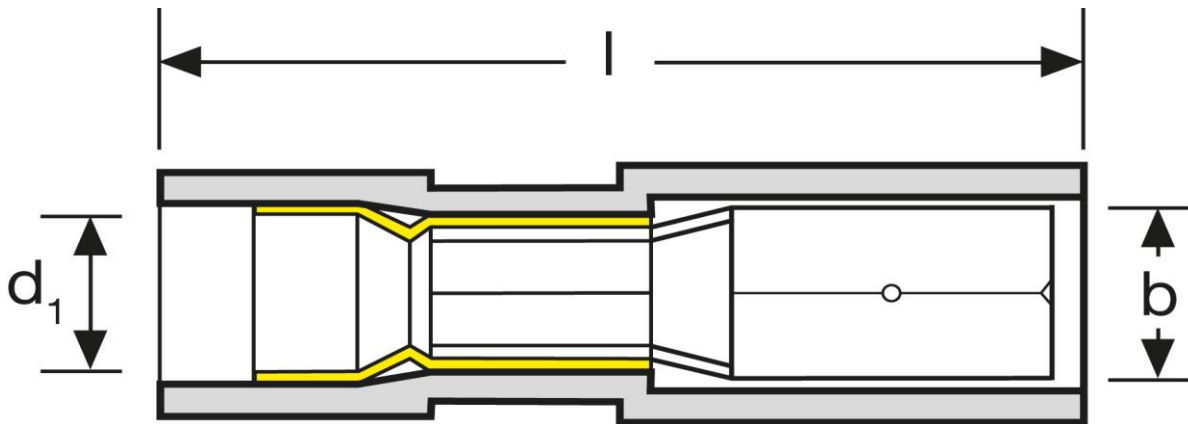


Art.Nr.	Werkstoff	Isolation	
K 420010N	Ms, E-Cu gal. Sn	PA 66	1.000
	l	b	s
in mm:	24	4,65	0,4
	Entflammbarkeitsklasse	Temperaturbereich	
	UL 94 V-2	-40°C bis +105°C	

Stand: 24.08.2016

Bullet female fully insulated
1,5 mm² - 4 mm



part no.	material	insulation	
K 420010N	Ms, E-Cu gal. Sn	PA 66	1.000

	l	b	s	d ₁
in mm:	24	4,65	0,4	4,3

flammability rating	temperature range
UL 94 V-2	-40°C up to +105°C

date: 24.08.2016