
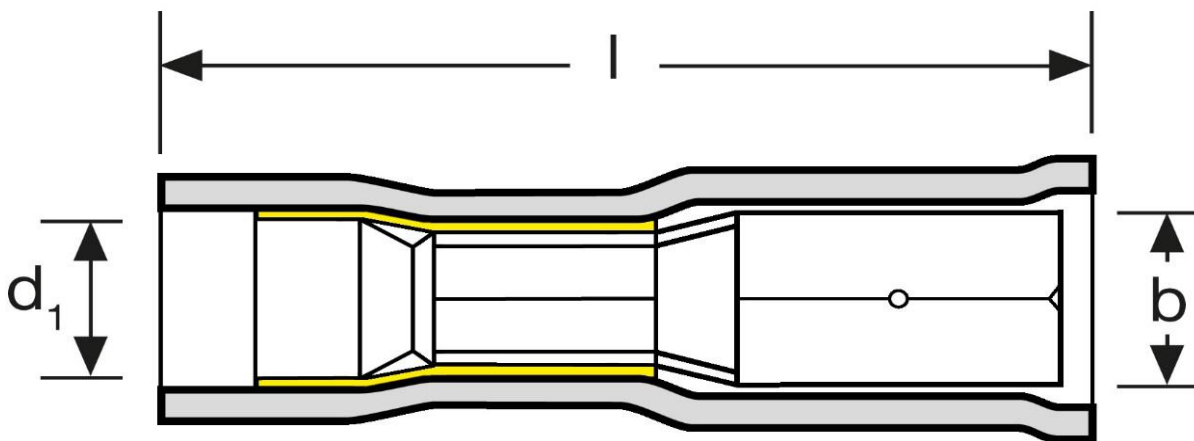



Rundsteckhülse vollisoliert
2,5 mm² - 4 mm

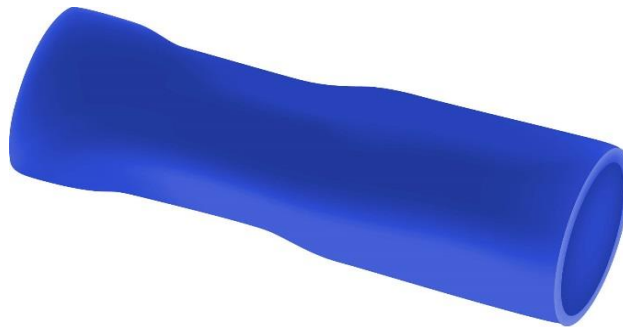



Art.Nr.	Werkstoff	Isolation	
K 421020D	Ms, E-Cu gal. Sn	PVC	1.000


	l	b	s	d ₁
in mm:	25	7,8	0,4	4,9

Entflammbarkeitsklasse	Temperaturbereich
UL 94 V-0	-30°C bis +70°C

Stand: 24.07.2018

Bullet female fully insulated
2,5 mm² - 4 mm

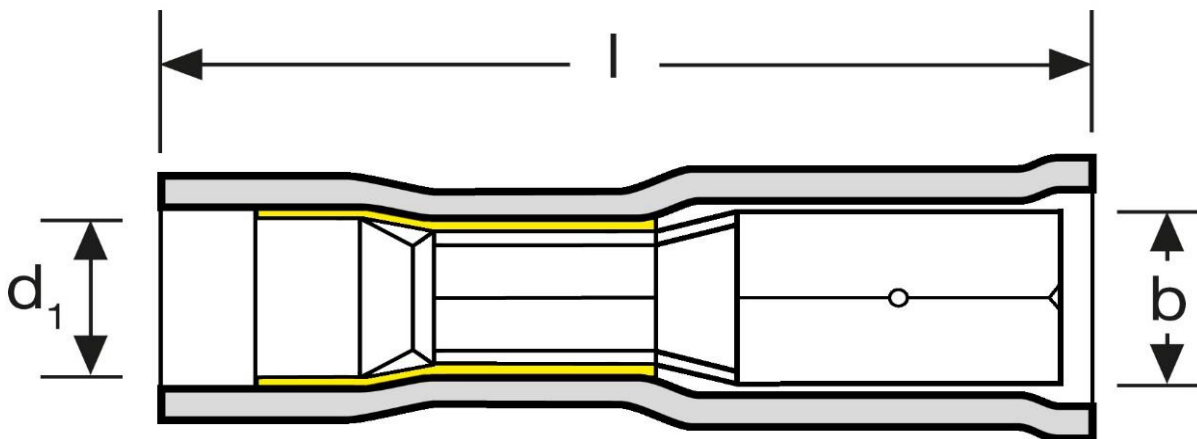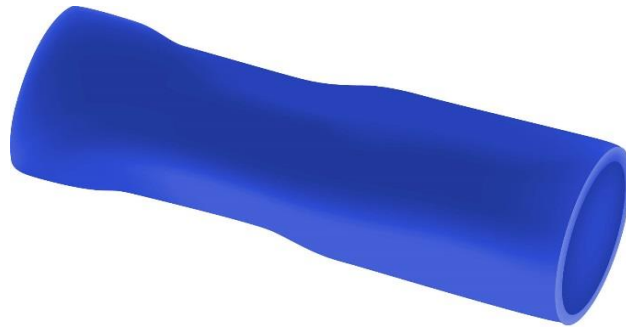

part no.	material	insulation	
K 421020D	Ms, E-Cu gal. Sn	PVC	1.000

	l	b	s	d ₁
in mm:	25	7,8	0,4	4,9

flammability rating	temperature range
UL 94 V-0	-30°C up to +70°C

date: 24.07.2018