



Rundstecker

1,5 mm² - 4 mm

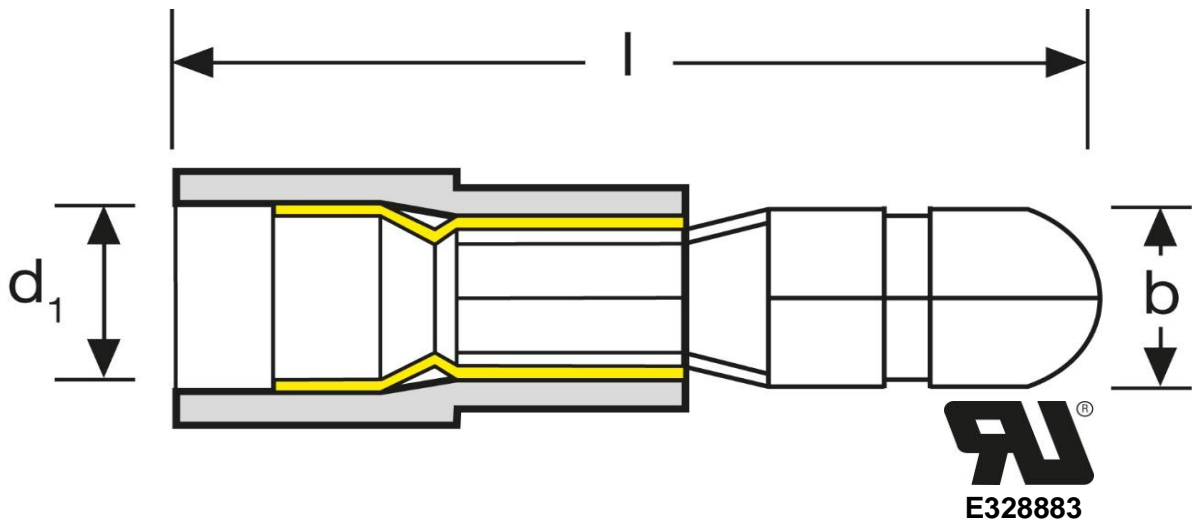


Art.Nr.	Werkstoff	Isolation	
K 423010N	Ms, E-Cu gal. Sn	PA 66	1.000


	l	b	d ₁	s
in mm:	22,0	4,0	4,1	0,4

Entflammbarkeitsklasse	Temperaturbereich
UL 94 V-2	-40°C bis +105°C

Stand: 05.08.2019

Bullet male
1,5 mm² - 4 mm

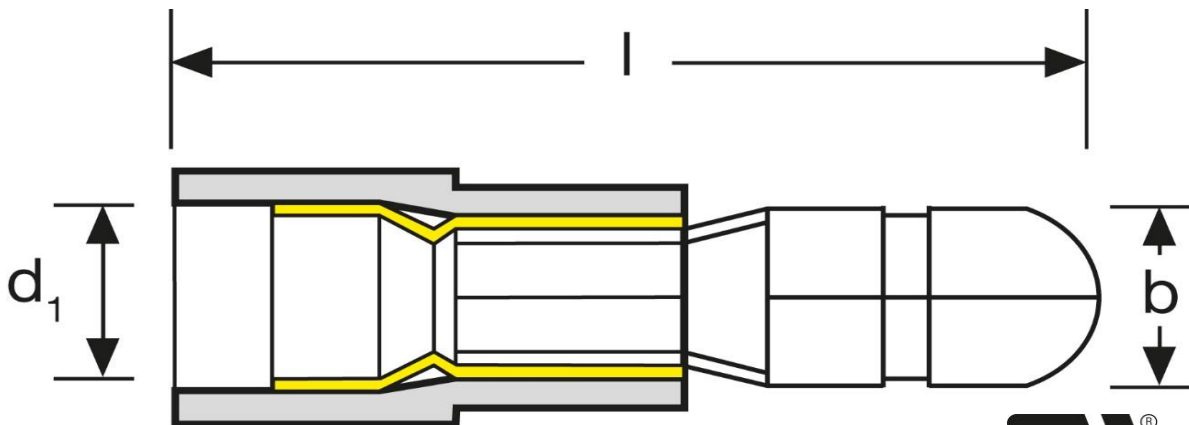

part no.	material	insulation	
K 423010N	Ms, E-Cu gal. Sn	PVC	1.000

	l	b	d ₁	s
in mm:	22,0	4,0	4,1	0,4

flammability rating	temperature range
UL 94 V-2	-40°C up to +105°C

date: 05.08.2019