
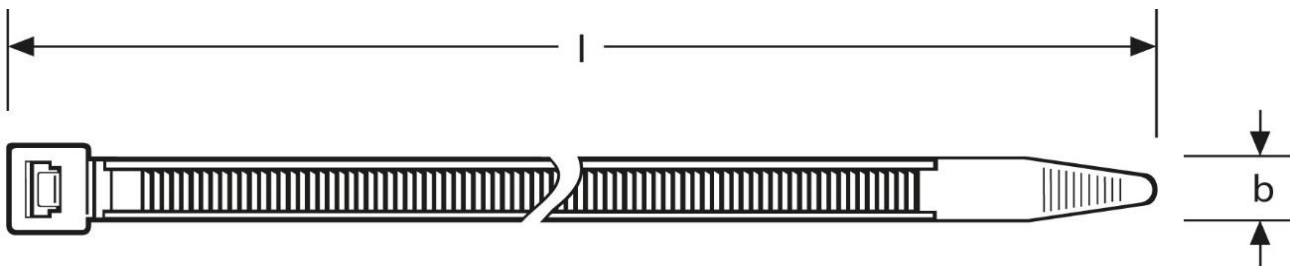



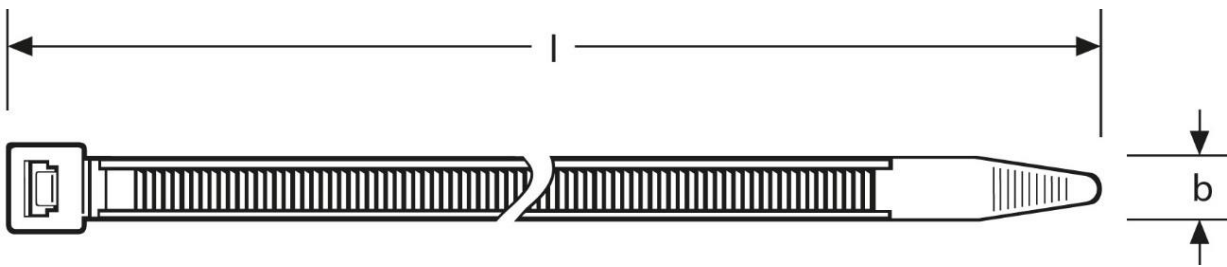
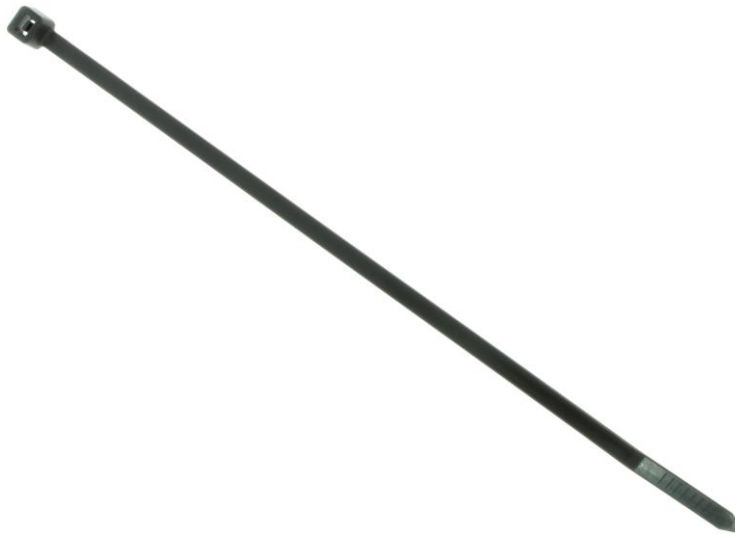
Kabelbinder 80 - 2,4 mm

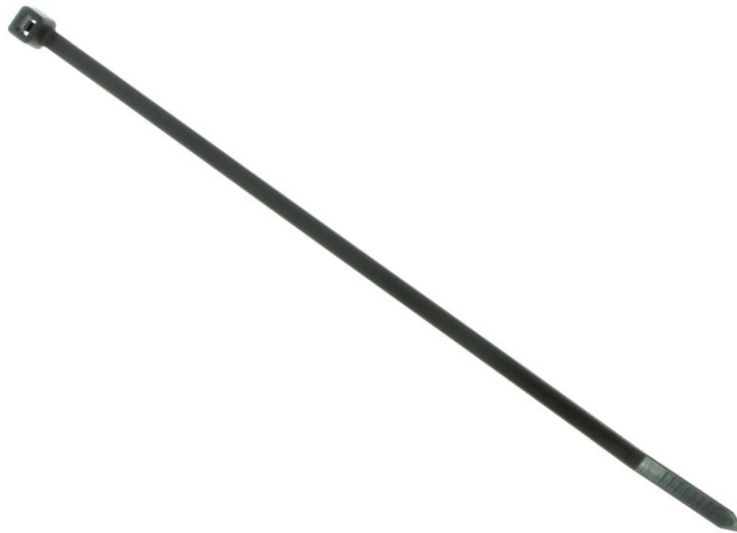


| | | | |
|----------------------------|--------------------------|----------------------|---|
| Art.Nr. | Werkstoff | Farbe |  |
| T 7004041.1 | Polyamid 66 | schwarz | 100 |
| | l | b | Kabelbaum min / max |
| in mm: | 80 | 2,4 | 1,5 / 15 |
| Entflammbarkeitskl. | Temperaturbereich | Zugfestigkeit | |
| UL 94 V-2 | -40°C bis + 85°C | 80 N | |

Stand: 25.10.2016

Cable ties
 80 - 2,4 mm



| | | | |
|----------------------------|--------------------------|-------------------------|---|
| part no. | material | colour |  |
| T 7004041.1 | Polyamide 66 | black | 100 |
| | l | b | bundle diam. min /max |
| in mm: | 80 | 2,4 | 1,5 / 15 |
| flammability rating | temperature range | tensile strength | |
| UL 94 V-2 | -40°C up to + 85°C | 80 N | |

date: 25.10.2016