
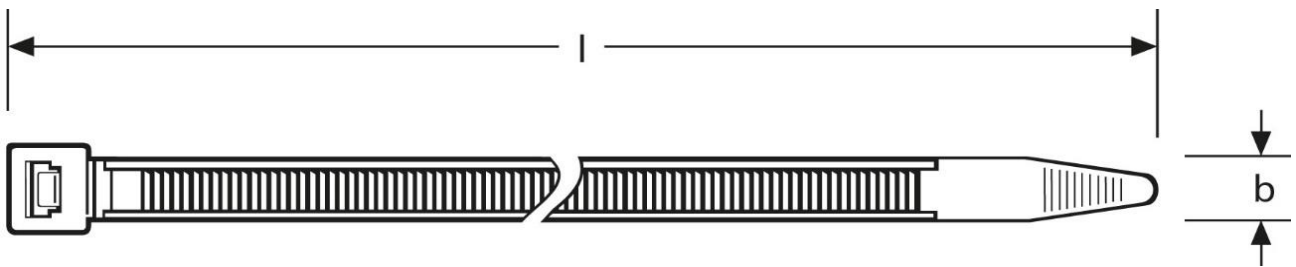



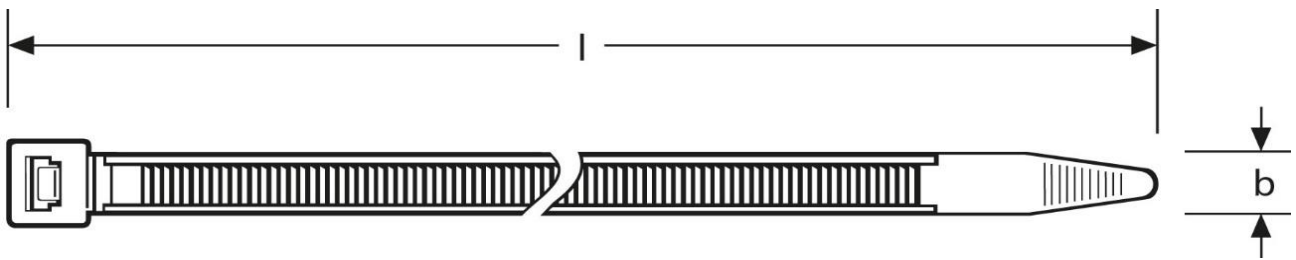
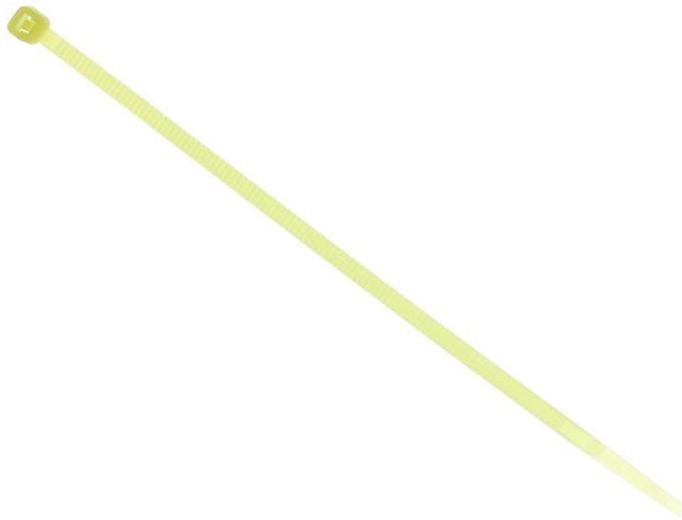
**Kabelbinder**  
 hitzestabilisiert  
 100 - 2,5 mm

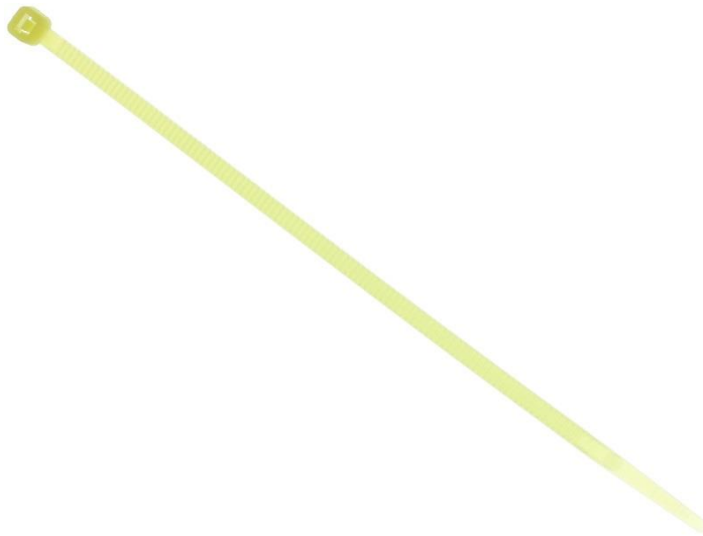


<b>Art.Nr.</b>	<b>Werkstoff</b>	<b>Farbe</b>	
T7004120HT	Polyamid 66 HT	natur	1.000
	<b>l</b>	<b>b</b>	<b>Kabelbaum min / max</b>
<b>in mm:</b>	100	2,5	1,5 / 22
<b>Entflammbarkeitskl.</b>	<b>Temperaturbereich</b>	<b>Zugfestigkeit</b>	
UL 94 V-2	-40°C bis + 120°C	80 N	

Stand: 14.02.2017

**Cable ties**  
 heat stabilized  
 100 - 2,5 mm



<b>part no.</b>	<b>material</b>	<b>colour</b>	
T7004120HT	Polyamide 66 HT	natural	1.000
	<b>l</b>	<b>b</b>	<b>bundle diam. min /max</b>
<b>in mm:</b>	100	2,5	1,5 / 22
<b>flammability rating</b>	<b>temperature range</b>	<b>tensile strength</b>	
UL 94 V-2	-40°C up to + 120°C	80 N	

date: 14.02.2017