



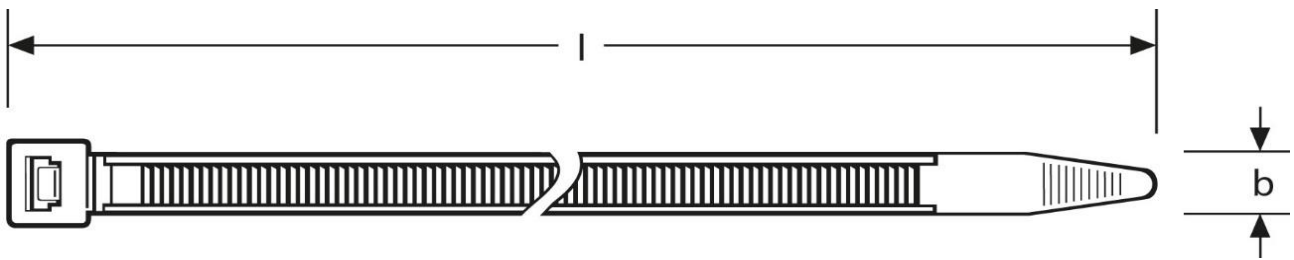
Kabelbinder 160 - 4,8 mm

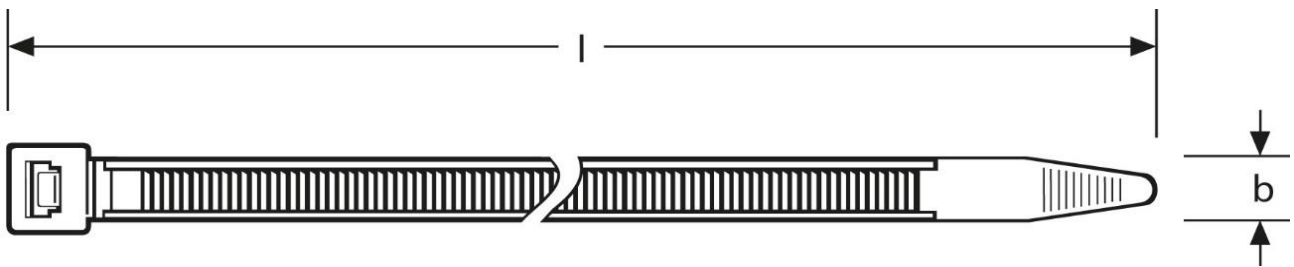


| | | | |
|----------------------------|--------------------------|----------------------|---|
| Art.Nr. | Werkstoff | Farbe |  |
| T 7012080.1 | Polyamid 66 | natur | 100 |
| | l | b | Kabelbaum min / max |
| in mm: | 160 | 4,8 | 3 / 38 |
| Entflammbarkeitskl. | Temperaturbereich | Zugfestigkeit | |
| UL 94 V-2 | -40°C bis + 85°C | 222 N | |

Stand: 03.02.2017

Cable ties
160 - 4,8 mm



| | | | |
|----------------------------|--------------------------|-------------------------|---|
| part no. | material | colour |  |
| T 7012080.1 | Polyamide 66 | natural | 100 |
| | l | b | bundle diam. min /max |
| in mm: | 160 | 4,8 | 3 / 38 |
| flammability rating | temperature range | tensile strength | |
| UL 94 V-2 | -40°C up to + 85°C | 222 N | |

date: 03.02.2017